

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
16 December 2004 (16.12.2004)

PCT

(10) International Publication Number
WO 2004/108474 A2

(51) International Patent Classification⁷: **B60P 1/28**

(21) International Application Number:
PCT/GB2004/002402

(22) International Filing Date: 4 June 2004 (04.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0313118.2 6 June 2003 (06.06.2003) GB

(71) Applicant and

(72) Inventor: HESKIN, Kelth, Clifford [GB/GB]; Andover
House, Fairmile, Henley-on-Thames Oxfordshire RG9 2LA
(GB).

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

(74) Agents: MCLEISH, Nicholas, Allstair, Maxwell et al.;
Boulton Wade Tennant, Verulam Gardens, 70 Gray's Inn
Road, LONDON WC1X 8BT (GB).

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only


Published:

— without international search report and to be republished
upon receipt of that report

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

[Continued on next page]

(54) Title: TIPPING MECHANISM

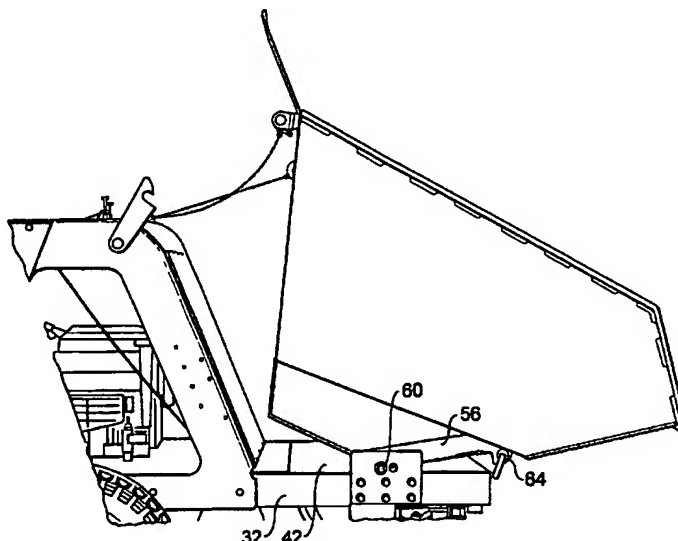

(57) Abstract: ABSTRACT TIPPING MECHANISM A tipping mechanism for a skip, especially the skip of a power barrow, is disclosed. A pivoting member is pivotally attached a) to a barrow frame about a first axis, and b) to the skip about a second axis, the second axis extending parallel to and spaced from the first axis. The skip is pivotable about the first axis between a first position, in which its centre of gravity (c.o.g.) is above and at/near the first axis, and a second position, in which the c.o.g. is above and at/near the second axis. The skip is also pivotable about the second axis between the second position and a third position, in which the c.o.g. is forward of the second axis. The skip may pivot from the first to third positions automatically, or by manual initiation, for some or all of the positions, to discharge the skip contents.

WO 2004/108474 A2

WO 2004/108474 A2



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.